

! In Mac system, the default shortcut keys are function keys.
! In Windows system, the default shortcut keys are F1-F12.
when Fn lock is closed, you need to press Fn+Shortcut to achieve the shortcut function.(Press Fn+Esc to open/close Fn lock)

	Red light is always on: Keyboard is charging Green light is always on: The battery is full Red blinking: Keyboard is low battery		FN Lock		Home page		Email		Music
	Green light always on: NUM keypad is on Green light on briefly: 2.4G mode has been entered		Previous		Play/Pause		Next		Copy
	Green light is always on: Caps lock is on Blue light on briefly: Bluetooth 1 mode has been entered Blue light blinks: entering Bluetooth 1 pairing status		Paste		Cut		Search		Back
	Green light is always on: Scroll lock is on Blue light on briefly: Bluetooth 2 mode has been entered Blue light blinks: entering Bluetooth 2 pairing status		Computer		Switch input method		APP switching		Lock screen
	Green light always on: FN lock open Tip: FN lock will switch the function of F1-F12 buttons when it is opened.		Click to switch to 2.4g (usb receiver) connection mode		Click to switch to Bluetooth 1/2 mode, long press to start pairing				

! The keyboard will automatically recognize the computer system When connected to a computer; if the computer can not automatically recognize the system, please manually switch the computer system.
Fn+m: Switch the keyboard to mac OS system. Fn+n: Switch the keyboard to Windows system.

Mode switching button
Click: Switch the current connection mode.
(switching order: 2.4G->Bluetooth 1->Bluetooth 2)
Long press: when you need to reconnect the Bluetooth device, long press it to enter pairing mode.
(2.4G mode can be used by simply plugging the USB receiver into the new device)

Low Battery Indicator/Charging Indicator
Low Battery Status: When the device is low on power, the red indicator light in this position will blink on to remind you to charge the device. Charging Status: When you are charging the device, the red indicator light in this position will be on continuously, and the red indicator light will be off when the device is fully charged.

2.4G Connection Indicator (USB Receiver)
When entering the 2.4G connection mode, the green indicator at this position will light up, at this time you can plug the USB receiver into the computer for normal use.

Bluetooth 1 Connection Indicator
When entering the Bluetooth 1 connection mode, the blue indicator light will be flashing, at this time you can find the Bluetooth device named "Meetion_MS_BT1" in the Bluetooth setting interface of the computer, and then you can use it normally after connecting.


Bluetooth 2 Connection Indicator
When entering the Bluetooth 2 connection mode, the blue indicator light will be flashing, at this time you can find the Bluetooth device named "Meetion_MS_BT2" in the Bluetooth setting interface of the computer, and then you can use it normally after connecting.

TypeC Charging Port
It is recommended to use the included charging cable to charge your device


DPI Indicator
When adjusting the speed of the mouse pointer, the corresponding white indicator light will be lit up

DPI Speed Switch Button
Pressing this button will switch to different mouse pointer movement speeds, from slow to fast: 800/1200/1600/2400.


USB receiver
Mouse 2.4G mode USB receiver

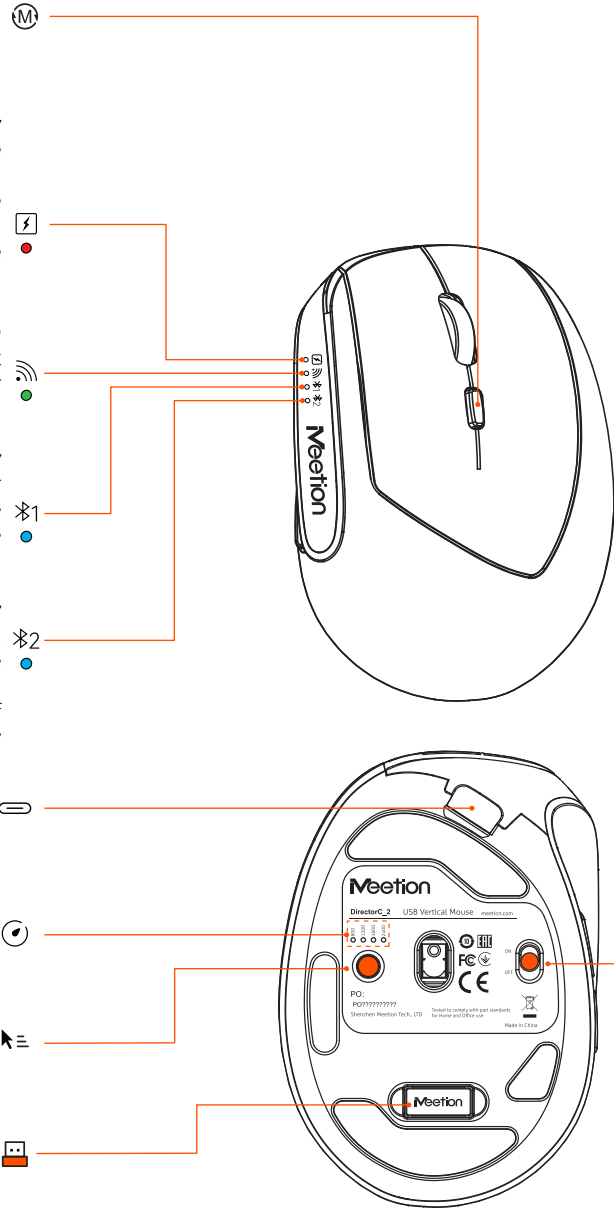


2.4G Mode Instructions (USB Receiver)

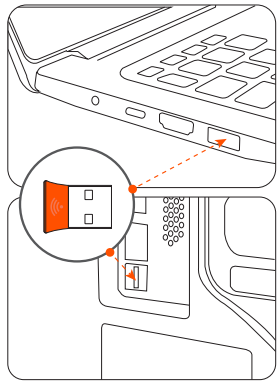


1. Insert the USB receiver into the USB port of your computer.

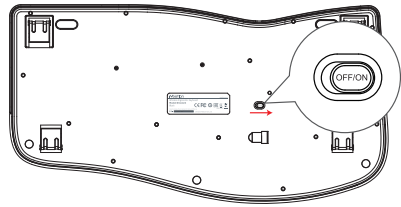


2. Toggle the switch to the right to the "ON" position to turn the unit on.

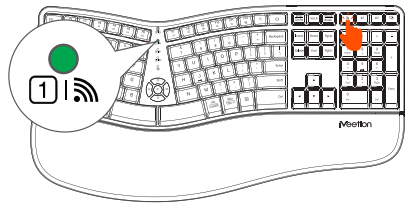

3. Click button to switch to 2.4G mode, the corresponding 2.4G indicator light

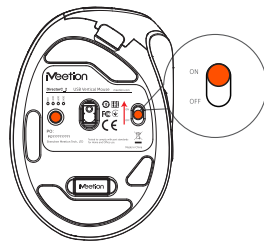


4. Toggle the switch upward to the "ON" position to turn the device on.




5. Click the "Mode Switching Button" to switch to 2.4G mode, the corresponding 2.4G indicator will light up green, get ready!

Keyboard and mouse share a common USB receiver


Bluetooth instructions

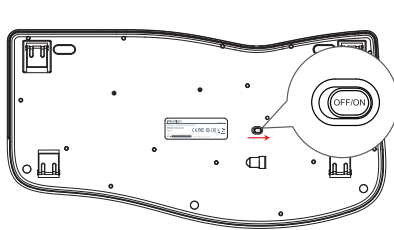


1. Toggle the switch to the right to the "ON" position to turn the unit on.

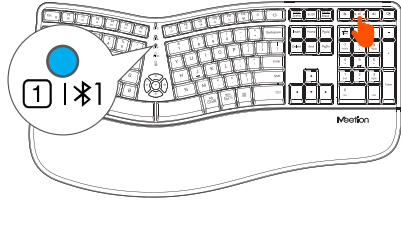


2. Click button to switch to Bluetooth 1 / Bluetooth 2 mode, the corresponding Bluetooth 1 / Bluetooth 2 indicator will light up blue and start blinking.

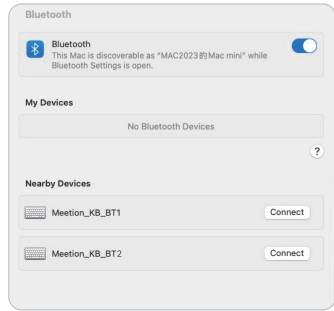


3. Find the device named "Meetion_K-B_BT1" / "Meetion_KB_BT2" in your computer's Bluetooth settings and connect it, get ready!

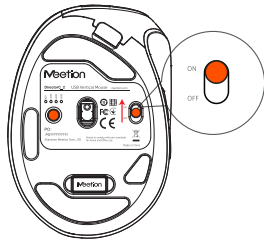

1. Toggle the switch upward to the "ON" position to turn the device on.




2. Click the "Mode Switching Button" to switch to Bluetooth 1 / Bluetooth 2 mode, the corresponding Bluetooth 1 / Bluetooth 2 indicator will light up blue and start blinking.

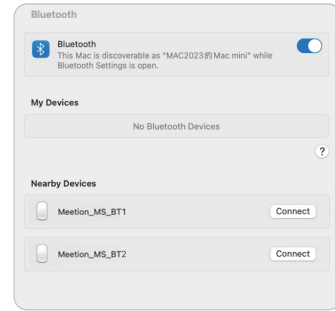

3. Find the device named "Meet-ion_MS_BT1" / "Meetion_MS_BT2" in your computer's Bluetooth settings and connect it, get ready!

Keyboard

How to reconnect Bluetooth?




If you want to reconnect your Bluetooth keyboard, please click button to switch to "Bluetooth 1"/"Bluetooth 2" mode, and then long press button again to make the blue light blinking, and then you can connect it in the Bluetooth settings!

If you encounter a keyboard failure, you can long press the FN+C button for 3S to restore the factory settings.

Mouse

How to reconnect Bluetooth?



If you want to reconnect your Bluetooth Mouse, please click the "Mode Switching Button" to switch to "Bluetooth 1"/"Bluetooth 2" mode, then long press the "Mode Switching Button" so that the blue light blinks, and then connect to it in the Bluetooth settings! Then connect in the Bluetooth settings!

GENERAL

All MEETION brand products comply with US FCC standards (FCC ID: 2A706), EU CE standards/CAUK standards, Bluetooth BQB certification.

The product is made in accordance with RoHS standard.

PRECAUTIONS

1.This product contains a rechargeable lithium battery.

(1)Do not dismantle,strike,crush,or put it into a fire.

(2)Stop using it immediately if severe swelling occurs.

(3)Do not place it in a high-temperature environment.

2.Do not use this device near water. 3.Only use a dry cloth to clean this product.

4.Please follow the manufacturer's instructions for use.

5.If the device is damaged,for example,if liquid enters it,if it gets wet in the rain or becomes damp,or if it cannot operate normally,it must be repaired.For repair matters,it should be entrusted to qualified maintenance personnel.

KIND TIPS

If the product is not in use for a long time,it is recommended to charge it every three months to activate the lithium battery inside the product and prevent battery failure due to long periods of non-use.

Meetion

TECHNICAL SUPPORT

Having technical problems with this product?
Send an email to service@meetion.com
For more information please visit:
www.meetion.com