


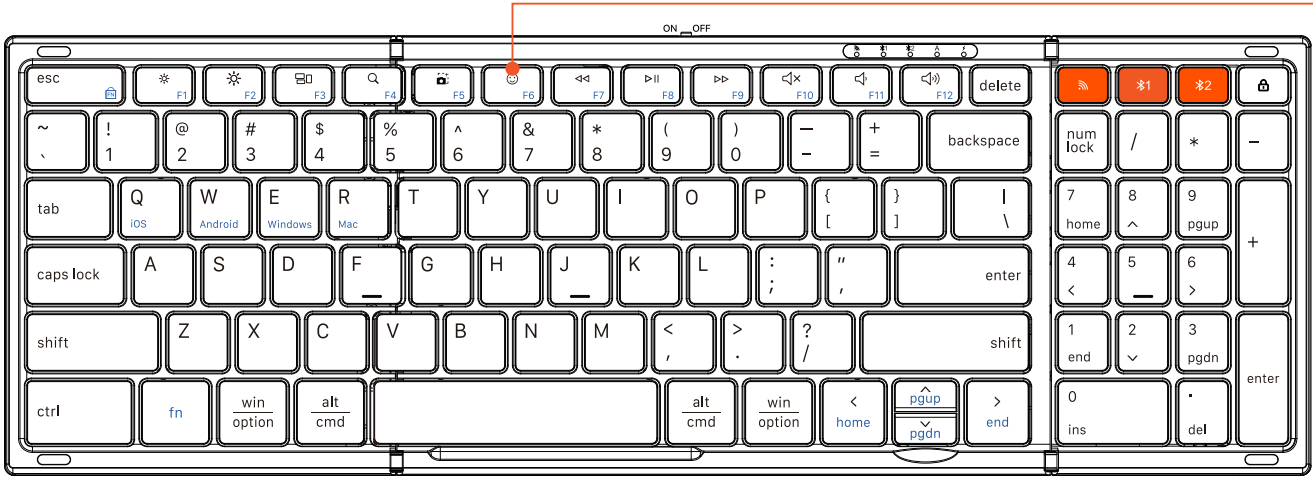

The emoji key function supports Windows, MacBook (macOS), iPad (iPadOS), and Android Samsung devices, but does not support iPhone (iOS).

Mode switching button

Click: Switch the current connection mode.
(Switch order: 2.4G → Bluetooth 1→Bluetooth 2)
Bluetooth mode: long press and hold for 3 seconds to enter pairing mode.
(Note: There is no function available under the 2.4G channel.)

DPI Speed Switch Button

DPI Speed Switch Button:click this button to adjust the speed of the mouse pointer, with 4 speed levels (DPI): 1200/1600/2400/3200.
The default speed level (DPI) is 1600.

Mouse receiver storage compartment

We recommend storing the USB receiver in this location when not in use.

2.4G Connection Indicator (USB Receiver)

When entering the 2.4G connection mode, the green indicator at this position will light up, at this time you can plug the USB receiver into the computer for normal use.

Bluetooth 1/2 Connection Indicator

When entering the Bluetooth 1/2 connection mode,the blue indicator light will be flashing, at this time you can find the Bluetooth device name “Meetion_MS_BT1/Meetion_MS_BT2”in the Bluetooth setting interface of the computer,and then you can use it normally after connecting.

Low Battery Indicator/Charging Indicator

Low Battery Status: When the device is low on power, the red indicator light in this position will blink on to remind you to charge the device.
Charging Status: When you are charging the device, the green indicator light in this position will be on continuously, and the green indicator light will be off when the device is fully charged.

⚠ When Fn lock is closed,you need to press Fn+Shortcut to achieve the shortcut function.(Press Fn+Esc to open/close Fn lock)

	Green light flashing rapidly: The keyboard is in working mode. Green Light Flashing Slowly: The keyboard is entering reconnecting mode for 2.4G. The green light stays on for 5 seconds and then goes off: Successfully reconnected in 2.4G mode.		2.4G switch key Single press: Switch to 2.4G channel.		Brightness-		Brightness+		Application switching
	Blue light flashing rapidly: Bluetooth 1 is entering pairing mode. (Long press:Bluetooth button)Blue light flashing slowly: Bluetooth 1 is entering reconnecting mode. The blue light stays on for 5 seconds and then goes off: Successfully reconnected in Bluetooth 1 mode.		Bluetooth 1 switch key Single press: Switch to Bluetooth channel.		Search		Screenshot		Emoji
	Blue light flashing rapidly: Bluetooth 2 is entering pairing mode. (Long press:Bluetooth button)Blue light flashing slowly: Bluetooth 2 is entering reconnecting mode. The blue light stays on for 5 seconds and then goes off: Successfully reconnected in Bluetooth 2 mode.		Bluetooth 2 switch key Single press: Switch to Bluetooth channel.		Previous		Play/Pause		Next
	Green light is always on: Caps lock is on.		Lock the screen		Mute		Volume-		Volume+
	Red light flashing rapidly: The device is low on power. Green light is on: The device is currently charging. Green light indicator is off: The device is fully charged.								

1 + = Fn Lock function

2 + = Long press restore Bluetooth to factory settings


3 + = Home

4 + = End


5 + = Pgdn

6 + = Pgup

Preparation steps before connecting:

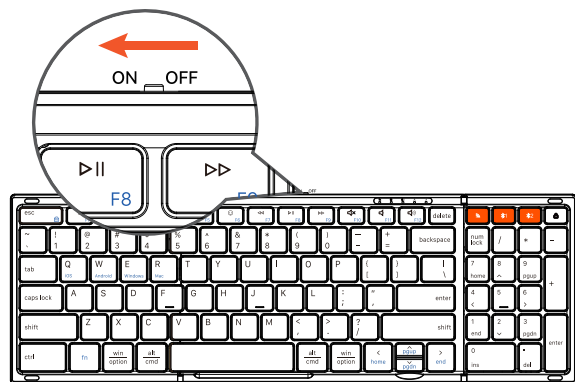

1. Please move the power switch of the keyboard right to the 'ON' position to turn on the device.

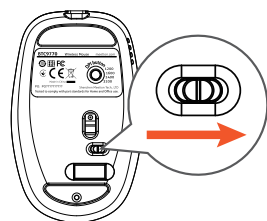


2. Please move the power switch of the mouse right to the 'ON' position to turn on the device.

fn + Q = iOS fn + W = Android
fn + E = Windows fn + R = Mac




3. Press FN + Q to switch to the iOS system, press FN + W to switch to the Android system, press FN + E to switch to the Windows system, and press FN + R to switch to the Mac system.

2.4G Mode Instructions (USB Receiver)

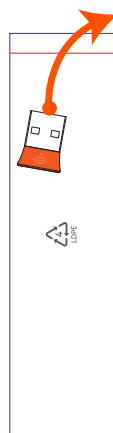


1. Please take the USB receiver out of the accessory bag.

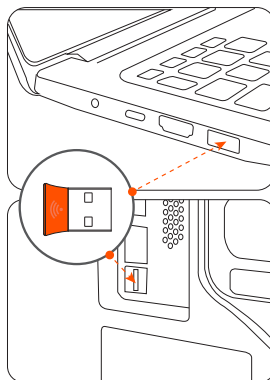

2. Please plug the USB receiver into the computer's USB port.




3. Click the 2.4G button to Switch to 2.4G mode; the 2.4G indicator light will illuminate.




4. Click the "Mode Switching Button" to switch to 2.4G mode, the corresponding 2.4G indicator will light up green, get ready!


Bluetooth instructions

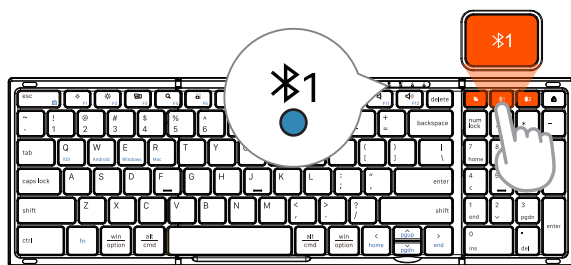


1. Press the *1/*2 key to switch to Bluetooth 1/Bluetooth 2 mode; the corresponding Bluetooth 1/Bluetooth 2 indicator light will turn blue and begin to blink.

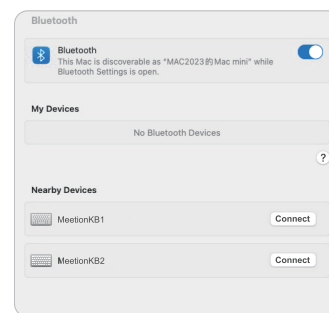

2. Locate the device named 'MeetionKB1'/'MeetionKB2' in your computer's Bluetooth settings and connect to it to prepare for use.

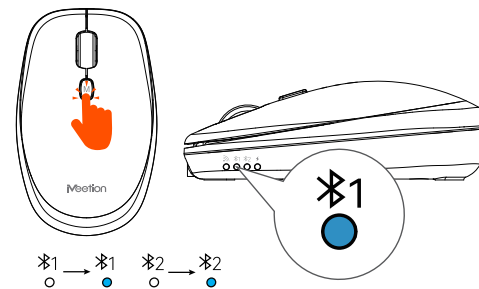


3. Click the "Mode Switching Button" to switch to Bluetooth 1/Bluetooth 2 mode, the corresponding Bluetooth 1/Bluetooth 2 indicator will light up blue and start blinking.

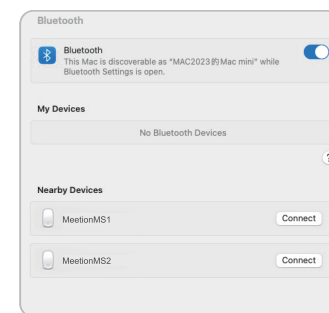

4. Find the device named "MeetionMS1"/'MeetionMS2" in your computer's Bluetooth settings and connect it, get ready!

Keyboard


How to reconnect Bluetooth?



Long press *1/*2 button again to make the blue light blinking, and then you can connect it in the Bluetooth settings!

Mouse

How to reconnect Bluetooth?



Long press the "Mode Switching Button" so that the blue light blinks, and then connect to it in the Bluetooth settings!

GENERAL

All MEETION brand products comply with US FCC standards (FCC ID: 2A706), EU CE standards/CAUK standards, Bluetooth BQB certification. The product is made in accordance with RoHS standard.

PRECAUTIONS

1. This product contains a rechargeable lithium battery.
- (1) Do not dismantle, strike, crush, or put it into a fire.
- (2) Stop using it immediately if severe swelling occurs.
- (3) Do not place it in a high-temperature environment.
2. Do not use this device near water.
3. Only use a dry cloth to clean this product.
4. Please follow the manufacturer's instructions for use.
5. If the device is damaged, for example, if liquid enters it, if it gets wet in the rain or becomes damp, or if it cannot operate normally, it must be repaired. For repair matters, it should be entrusted to qualified maintenance personnel.

KIND TIPS

If the product is not in use for a long time, it is recommended to charge it every three months to activate the lithium battery inside the product and prevent battery failure due to long periods of non-use.

Troubleshooting:

Do keyboard/mouse have sleep function?

Yes, both the keyboard and mouse are equipped with an automatic sleep mode for power saving, and press any key to activate them.

Connection Issue/Certain keys not working/Typing delay or keys repeating?

1. Restart keyboard (turn off/on) or recharge if battery is low.
 2. Reduce distance from device.
 3. Check for debris under keys.
 4. Replug 2.4G receiver into another USB port.
- Bluetooth: Clear pairing history, re-pair. Ensure device Bluetooth ≥ 5.3.

Why can't I connect to the computer using the USB cable?

The included USB cable is for charging only and does not have a data transfer function, the connection needs to be done through the receiver or Bluetooth.

Can I connect and switch between multiple devices with the keyboard and mouse combo?

Our combo supports 3-device connectivity via:
1x 2.4G receiver (for 1 device)
2x Bluetooth channels (for 2 additional devices)
This lets you connect 3 devices simultaneously—no need for multiple peripherals, keeping your workspace tidy.

What can I do if MEETION keyboard fails to connect?

1. Replug receiver into another USB port.
2. If using a Bluetooth connection, in the Bluetooth settings of the device, clear the pairing history and re-pair the device.
3. Restart your device, as well as the keyboard and mouse.

Meetion

TECHNICAL SUPPORT

Having technical problems with this product?
Send an email to service@meetion.com
For more information please visit:
www.meetion.com