


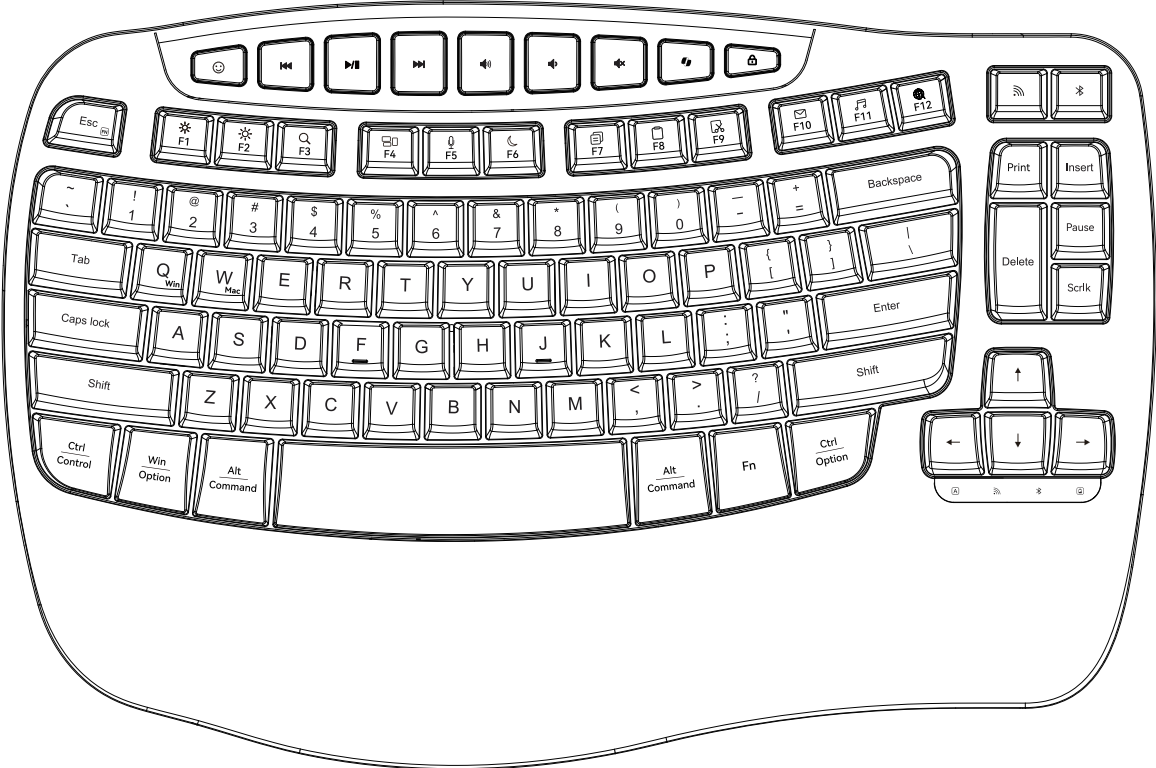

USER’S MANUAL

BTK9330


CA

US

UK

 The Windows system defaults to the F1-F12 shortcuts, while the Mac system defaults to function keys shortcuts.
To switch to the Windows system, press FN+Q; to switch to the Mac system, press FN+W.

	Green light always on: Caps lock is on Green light is out: Caps lock is off.							Blue light flashing rapidly: Bluetooth is entering pairing mode. Blue light flashing slowly: Bluetooth is entering reconnecting mode.					
	Green Light Flashing Rapidly: The keyboard is in working mode. Green Light Flashing Slowly: The keyboard is entering reconnecting mode for 2.4G.							Red light blinking rapidly: Keyboard battery is low.					
	Tap or press and hold to switch to 2.4G mode.							Click the button to switch to Bluetooth mode, then long press again to enter Bluetooth pairing mode					
	Emoji		Previous		Volume up		Decrease brightness		Increase brightness		Search		Application switching
	Lock screen		Play&Stop		Volume down		Win: dictate /Mac: Siri		Dormant		Copy		Paste
	Win:Copilot/ Mac:Toggle application		Next		Mute		Cut		Email		Music		Voice switching

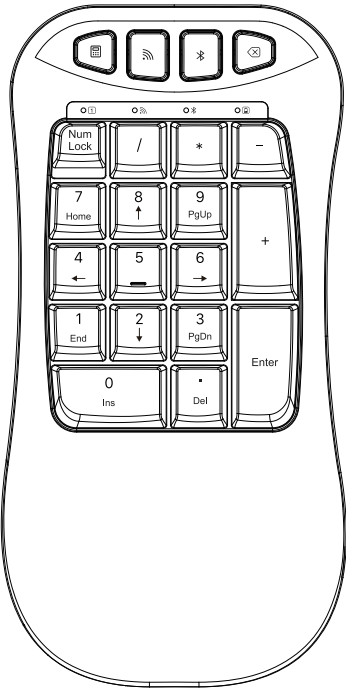


 Press and hold the  +  button for 5 seconds to restore factory settings; all indicators will blink 3 times to confirm successful restoration.

	Calculators		Press the button to switch to Bluetooth mode. Long press for 3 seconds to enter Bluetooth pairing mode.
	Press the button to switch to 2.4G mode. Long press for 3 seconds to enter 2.4G pairing mode.		Backspace
	Green light is always on: NUM keypad is on. Green light is off: NUM keypad is off.		Fast flashing green light: Keyboard is in operational mode. Slow flashing green light: 2.4G connection is entering reconnect mode.
	Fast blinking blue light: Bluetooth in pairing mode. Slow blinking blue light: Bluetooth in reconnecting mode.		Fast blinking red light: Keyboard battery is low.

Preparation steps before connecting:

-  The battery is not included. You will need to provide your own.
When the battery is low, the product may experience delays. Please replace the battery in a timely manner.

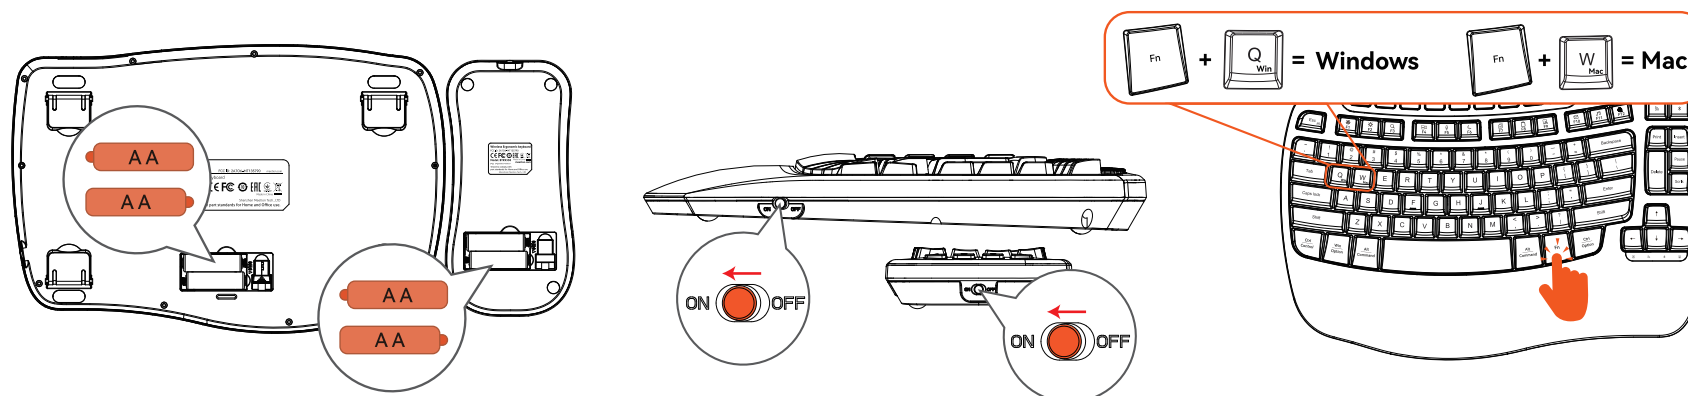


1. Install the batteries into the keyboard battery compartments.

2. Push the switch to the left to turn the device ON.

3. Press FN + Q to switch to the Windows system, and press FN + W to switch to the Mac system. The indicator light will blink three times to indicate a successful switch.

2.4G Mode Instructions (USB Receiver)

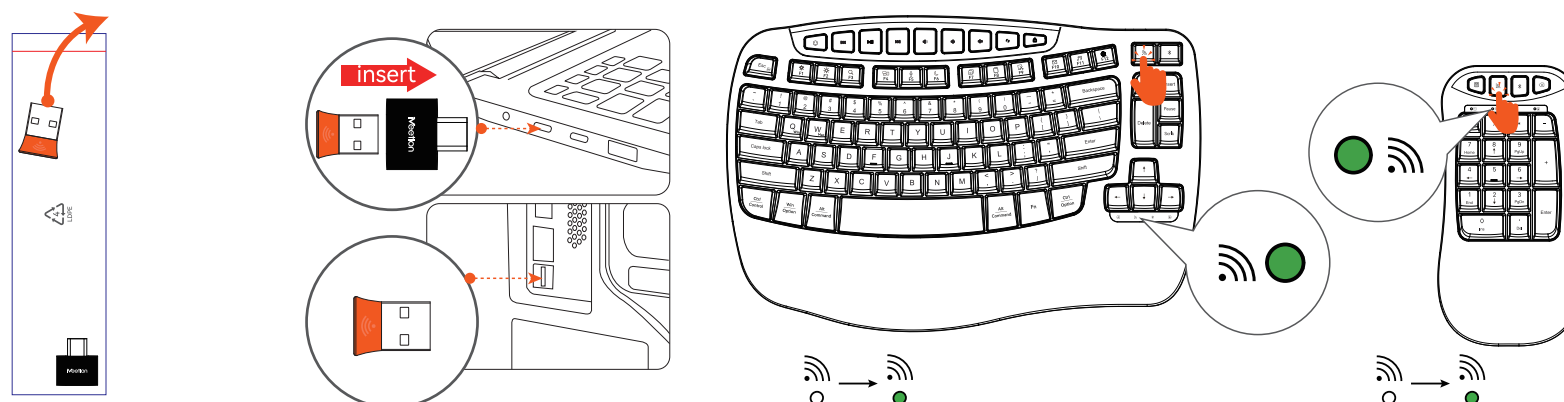


1. Please take the USB receiver out of the accessory bag.

2. Insert the USB receiver into the computer's USB port.

3. Click  button to Switch to 2.4G mode; the 2.4G indicator light will illuminate.

3. Click  button to Switch to 2.4G mode; the 2.4G indicator light will illuminate.

Bluetooth instructions

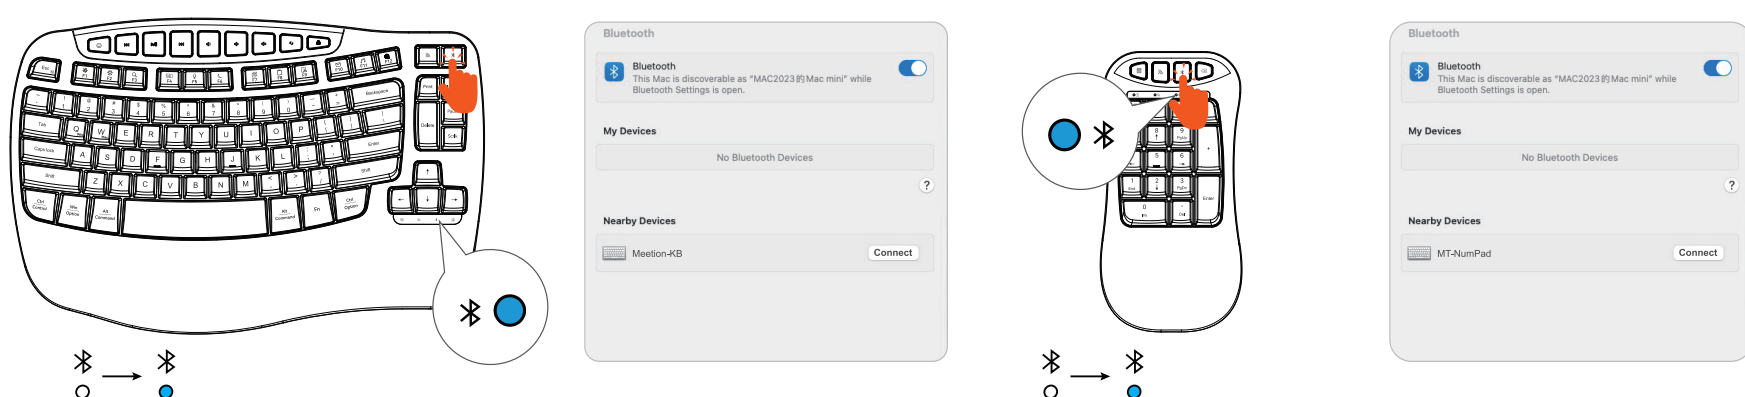

1. Press the  key to switch to Bluetooth mode; the corresponding Bluetooth indicator light will turn blue and begin to blink.


2. Locate the device named 'Meeting - KB' in your computer's Bluetooth settings and connect to it to prepare for use.

3. Press the  key to switch to Bluetooth mode; the corresponding Bluetooth indicator light will turn blue and begin to blink.

4. Locate the device named 'MT-NumPad' in your computer's Bluetooth settings, connect to it, and get ready!

Keyboard

How to reconnect Bluetooth?



If you want to reconnect the Bluetooth keyboard, press the  key to switch to Bluetooth mode, then press and hold the  key until the blue indicator light starts to blink. You can then reconnect it in your Bluetooth settings.

GENERAL

The products comply with US FCC standards (FCC ID: 2A706), EU CE standards, CAUK standards, and Bluetooth BQB certification. Additionally, the product is manufactured in accordance with RoHS standards.

PRECAUTIONS

1. Do not dismantle, strike, crush, or put it into a fire.
2. Stop using it immediately if severe swelling occurs.
3. Do not place it in a high-temperature environment.
4. Do not use this device near water.
5. Only use a dry cloth to clean this product.
6. Please follow the manufacturer's instructions for use.
7. If the device is damaged (for example, if liquid enters it, if it gets wet in the rain, or if it cannot operate normally), it must be repaired. For repair issues, it should be entrusted to qualified maintenance personnel.

TECHNICAL SUPPORT

Having technical problems with this product?
Send an email to service@meition.com
For more information please visit:
www.meition.com